McINTOSH COUNTY ACADEMY SECURE ENTRANCE LOBBY

8945 US-17, Darien, GA 31305

GENERAL NOTES

THE FOLLOWING NOTES SUPPLEMENT AND ADD TO THE DRAWINGS AND SPECIFICATIONS. IF THERE IS ANY CONFLICT, AMBIGUITY, ETC., CREATED BY ANY NOTE, THE CONTRACTOR SHALL COMPLY WITH THE MORE STRINGENT REQUIREMENT.

A. DIMENSIONS:
THE GENERAL CONTRACTOR, SUBCONTRACTORS AND ALL EMPLOYEES ON THIS PROJECT ARE NOT ALLOWED TO SCALE DRAWINGS TO DETERMINE DISTANCES NOT DIMENSIONED. IF FURTHER DIMENSIONING IS REQUIRED, THE CONTRACTOR SHALL REQUEST IN WRITING FOR WRITTEN CLARIFICATION BY THE ARCHITECT. ALL DIMENSIONS ARE GIVEN TO FACE OF CMU, FACE OF BRICK, OR FACE OF STUD UNLESS NOTED OTHERWISE.

2. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, GRADE PITCHES AND OTHER CONDITIONS BY TAKING MEASUREMENTS PRIOR TO ORDERING MATERIALS OR DOING WORK. REFER DISCREPANCIES TO THE ARCHITECT FOR ADDITIONAL INSTRUCTIONS. THE CONTRACTOR IS RESPONSIBLE FOR MEASUREMENTS. NO CONSIDERATION WILL BE GIVEN TO ANY CLAIM BASED ON DIFFERENCES BETWEEN DRAWINGS OR SPECIFICATIONS AND ACTUAL MEASUREMENTS.

B. SIMILAR CONDITIONS:
1. WHERE A DETAIL OR SECTION IS SHOWN FOR ONE CONDITION, IT APPLIES TO ALL LIKE OR SIMILAR CONDITIONS.

C. COORDINATION:
1. COORDINATING ROUTING OF THE CONTRACTOR'S WORK WITH OTHER TRADES IS ESSENTIAL, AND ANY EXPENSE REQUIRED FOR REMOVAL OR RELOCATION SHALL BE BORNE BY THE CONTRACTOR.

D. CONCRETE BLOCK:
1. SMOOTH FACE CONCRETE BLOCK SHALL BE USED AT ALL EXPOSED (OUTSIDE) CORNERS AT WALLS AND PARTITIONS INSIDE BUILDING INCLUDING WINDOW AND DOOR JAMB CONDITIONS.
2. WHERE CONCRETE BLOCK IS EXPOSED AT INTERIOR WALLS, PROVIDE SHALLOW CONCAVE CONCRETE BLOCK JOINTS IN KITCHENS AND ALL TOILET ROOMS.
3. CONTRACTOR SHALL PROVIDE MASONRY WALLS TO MEET ALL REQUIREMENTS OF FINISH INSTALLER. MANUFACTURER SHALL ENSURE THAT ALL MATERIAL AND INSTALLATION WARRANTIES REMAIN EFFECTIVE.
4. JOINT REINFORCING MAY BE OMITTED IN DETAILING FOR CLARITY; INSTALL IN MASONRY JOINTS AT DESIGNATED INTERVALS WHETHER SHOWN OR NOT.
5. IN ROOMS WITH EXPOSED STRUCTURAL CEILING, EXTEND WALLS TO ROOF OR FLOOR DECK ABOVE.

JOHN A. TUTEN & ASSOCIATES, ARCHITECTS
4680 Hwy 17 North
Brunswick, Georgia 30525
Phone: (912) 265-8686
Fax: (912) 267-6409
Email: johnt@johntuten.com

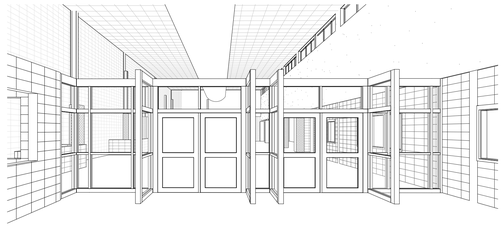

SECURE LOBBY VIEW

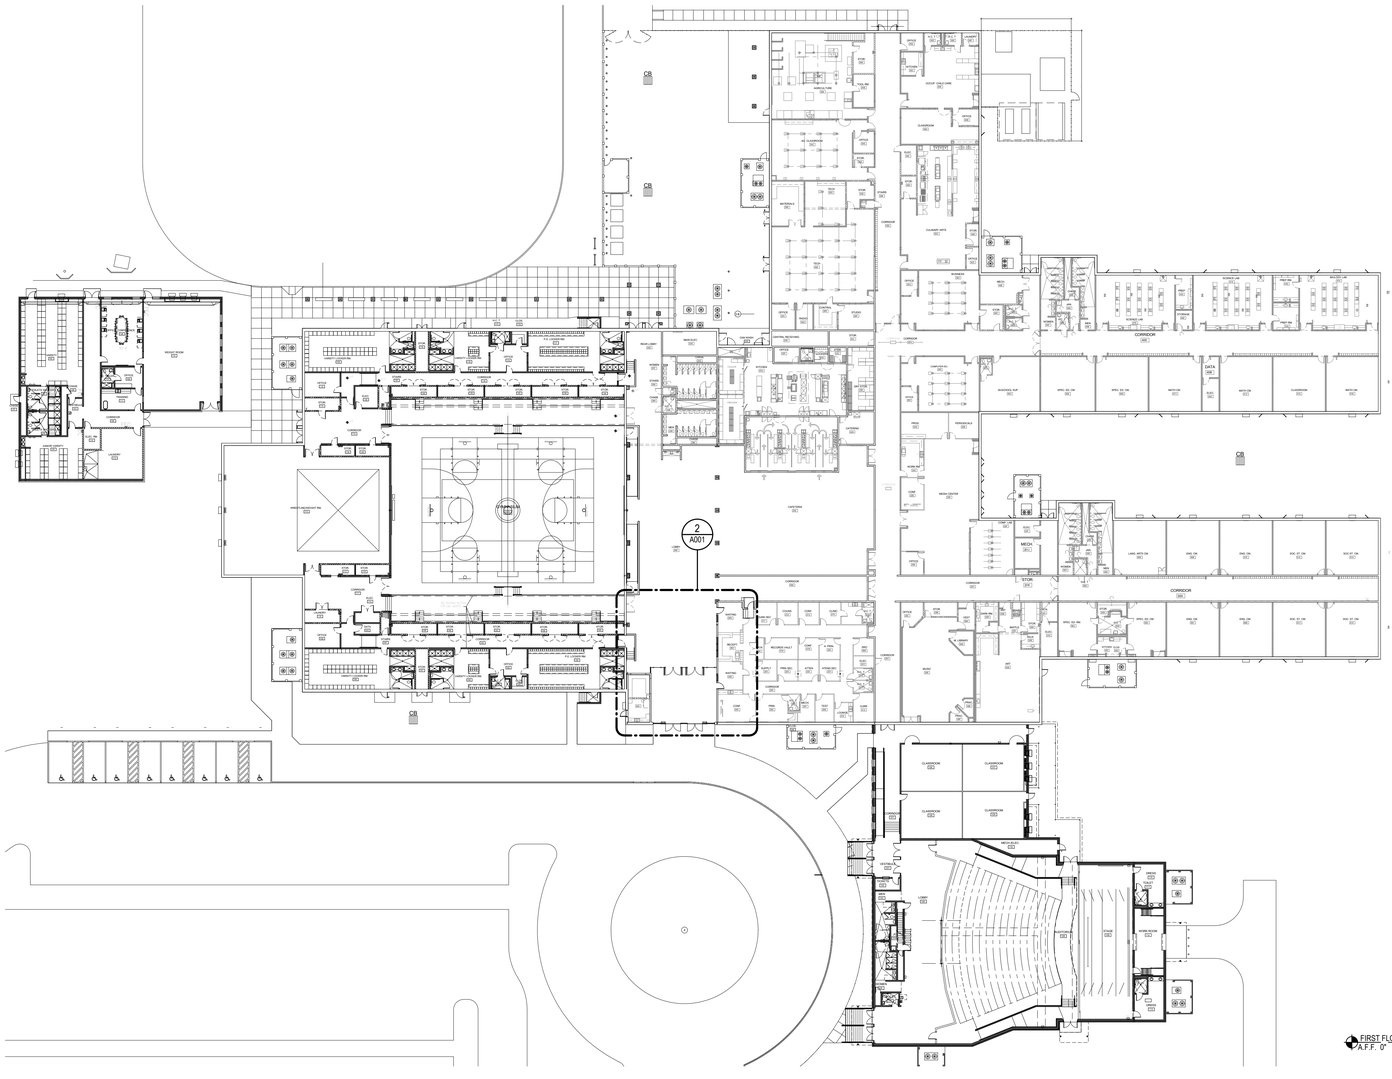

1 A001 FIRST FLOOR
SCALE: 1" = 30'-0"

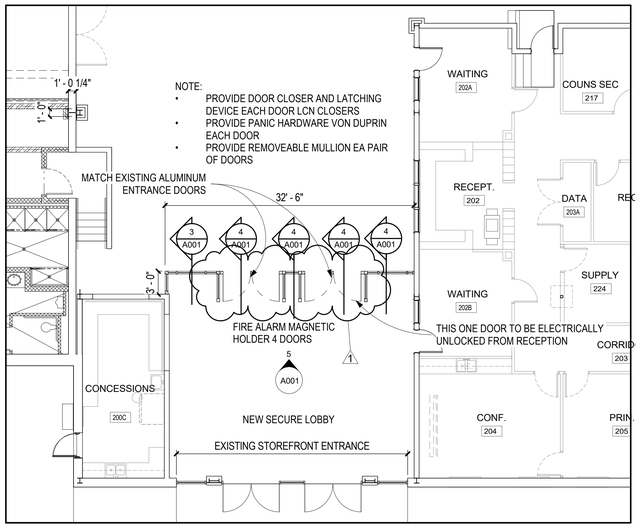

2 A001 ENTRANCE LOBBY PLAN
SCALE: 1/8" = 1'-0"

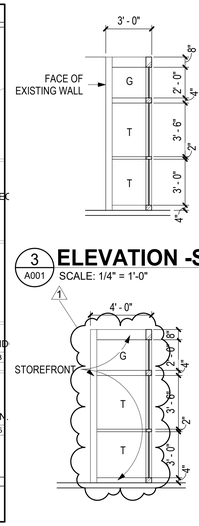

3 A001 ELEVATION -SIDE
SCALE: 1/4" = 1'-0"

4 A001 STOREFRONT BRACE
SCALE: 1/4" = 1'-0"

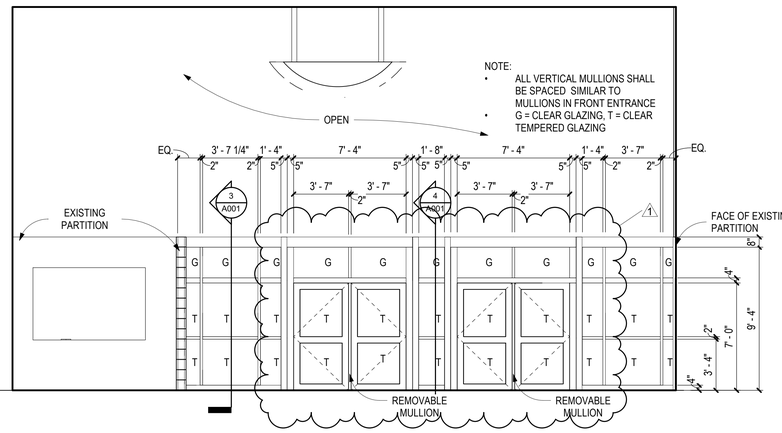

5 A001 FRAME ELEVATION SECURITY BARRIER
SCALE: 1/4" = 1'-0"

JOHN A. TUTEN & ASSOCIATES ARCHITECTS
4680 U.S. HIGHWAY 17 NORTH
BRUNSWICK, GEORGIA 31525
www.johntuten.com

McINTOSH COUNTY ACADEMY SECURE ENTRANCE LOBBY
8945 US-17, Darien, GA 31305
McINTOSH COUNTY BOARD OF EDUCATION

CAPITAL OUTLAY PROJECT # TBD
SYSTEM CODE: ?
SCHOOL CODE: ?
FTE: ?

ISSUED FOR: PROGRESS
PROJECT DATE: 4/23/19
PROJECT NUMBER: 19/13

COVER SHEET

NO.	REVISIONS	REVISION / SUBMISSIONS	DATE
1			05/16/19

SHEET: A001

Copyright (c) 2019. All Rights Reserved.

5/16/2019 12:51:46 PM C:\Users\cwy\Desktop\Local Files\1913 MCA Secure Entrance_chris[N4NSF.rvt